

Outdoor Silos

With FullFlow system – that ensures high fodder quality

A silo, at its' core, may come across as a simple product – but then again not!

A silo needs to meet a number of requirements:

- > A silo must be easy to install in accordance with the requirements and it has to be leveled.
- > The silo must continuously maintain a high level of hygiene.
- > The silo must be strong and robust.
- > The silo must be dimensionally stable at both high and low temperatures.
- > The silo must be easy to inspect and monitor.

A Tunetanken outdoor silo is of the highest quality. The silo is manufactured in fiberglass reinforced composite. A unique material also used in the manufacturing of highly strained products such as windmills, ships, airplanes, bridges etc. The material can also be reused.



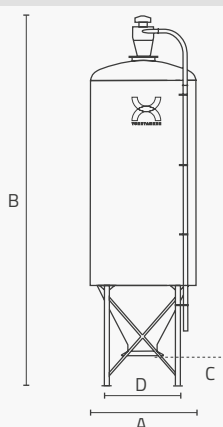
Delivered with

- > Cyclone with ventilation hut.
- > Blow-in pipe and bending with a large radius.
- > Raincollar above outlet.
- > Clear or greywhite topcoat (RAL 9002).

A Tunetanken silo is thought out with regard to installation - operation - maintenance - life time - environment.

Extra equipment:

Ventilation pipe. Sight stripe. Manhole. Electronic level indicator. Bottom outlet. Vibration motor etc.

| Illustration | Type | Volume | | Dimensions | | | |
|---|------|-------------------|----------------------|--------------|------------------|------------------------------|--------------|
| | | Volume | Content ¹ | Diameter (A) | Total height (B) | Free height ² (C) | Distance (D) |
|  | FC13 | 13 m ³ | 8,4 t | 2,400 | 6,100 | 540 / 520 | 1,690 |
| | FC16 | 16 m ³ | 10,4 t | 2,400 | 6,760 | 540 / 520 | 1,690 |
| | FC21 | 21 m ³ | 13,7 t | 2,400 | 7,860 | 540 / 520 | 1,690 |
| | FC26 | 26 m ³ | 16,9 t | 2,400 | 8,970 | 540 / 520 | 1,690 |
| | FC32 | 32 m ³ | 20,8 t | 2,400 | 10,420 | 540 / 520 | 1,690 |
| | FC40 | 40 m ³ | 26,0 t | 3,000 | 9,300 | 540 / 520 | 2,110 |
| | FC45 | 45 m ³ | 29,3 t | 3,000 | 10,000 | 540 / 520 | 2,110 |
| | FC50 | 50 m ³ | 32,5 t | 3,000 | 10,750 | 540 / 520 | 2,110 |
| | FC60 | 60 m ³ | 39,0 t | 3,000 | 12,130 | 540 / 520 | 2,110 |
| | FC75 | 75 m ³ | 48,8 t | 3,000 | 14,255 | 540 / 520 | 1,500 |
| | FC90 | 90 m ³ | 58,5 t | 3,000 | 15,900 | 540 / 520 | 1,500 |

*All undefined measurements are in mm.

¹ Approx. amount of fodder in ton with a density of 650 kg/m³.

² Free height under the silo once a square flange 300 mm. / round flange Ø160 mm is mounted.